



名称: 東京 / 横浜局受信混合器 指定ch帯域通過以外は減衰特性
 品番: MIX-2B(U18/U20-U28)

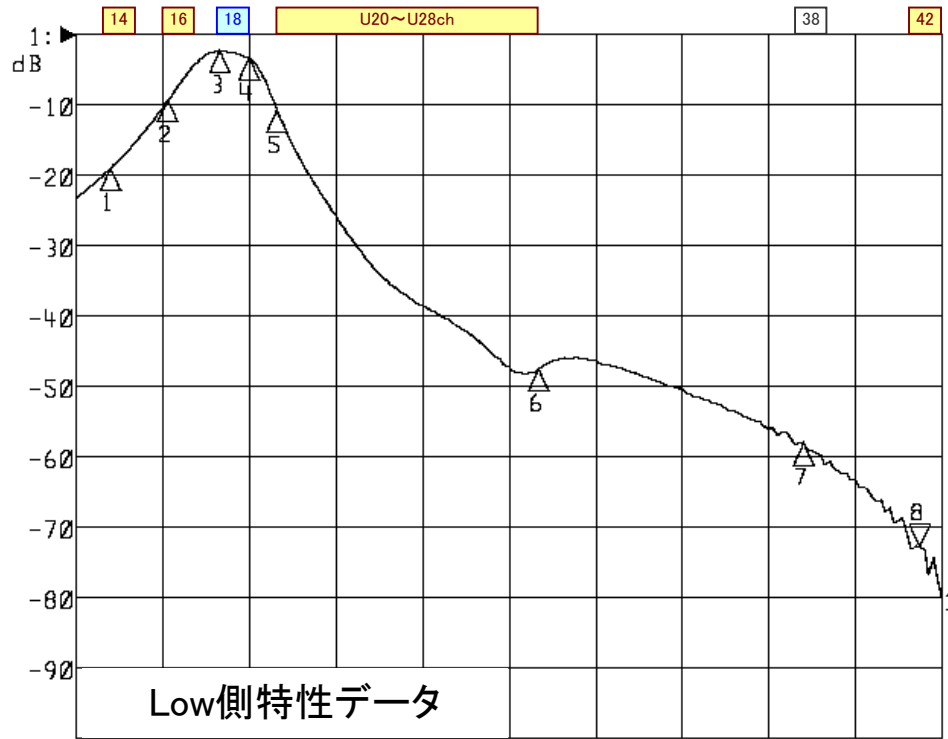


Center 560.000 MHz Span 180.000 MHz

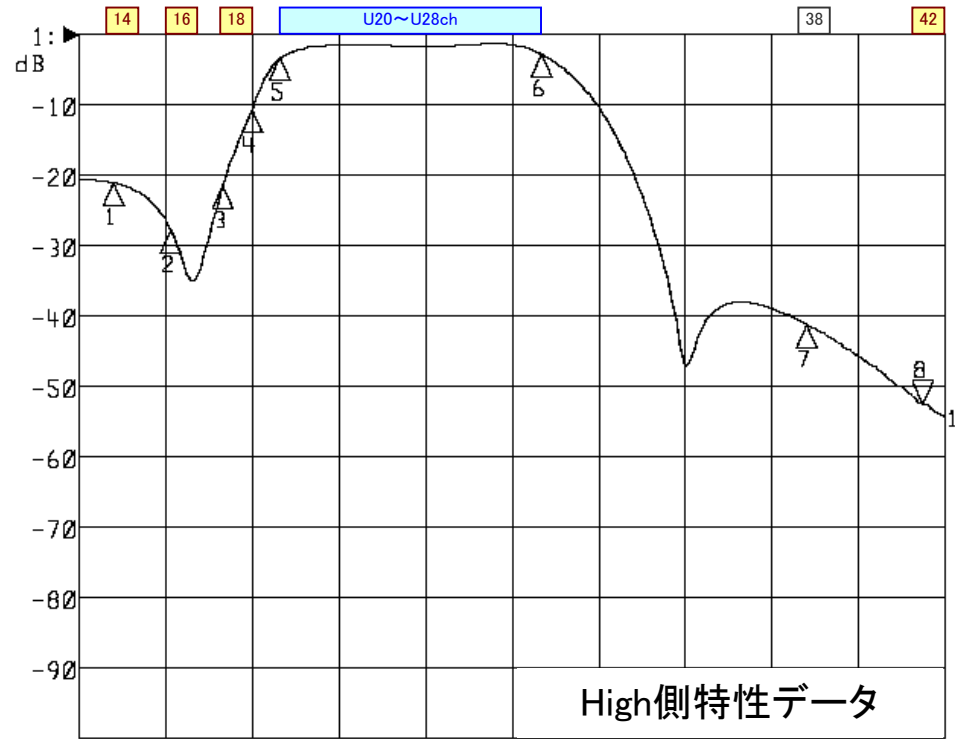

Center 560.000 MHz Span 180.000 MHz


1: Mkr (MHz)	dB
1: 477.2500	-19.008
2: 489.2500	-9.284
3: 500.0000	-2.373
4: 506.0000	-3.359
5: 512.0000	-10.787
6: 566.0000	-47.559
7: 621.2500	-57.926
8> 645.2500	-72.760

<広帯域データ>

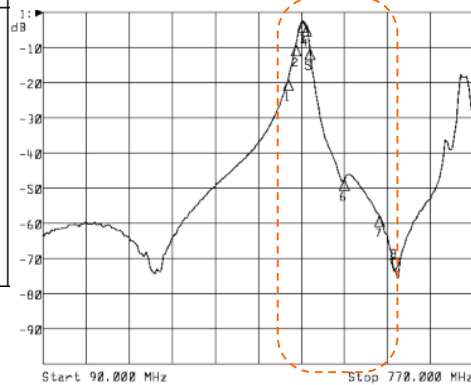

1: Mkr (MHz)	dB
1: 477.2500	-21.079
2: 489.2500	-27.855
3: 500.0000	-21.417
4: 506.0000	-10.672
5: 512.0000	-3.321
6: 566.0000	-2.701
7: 621.2500	-41.200
8> 645.2500	-52.440

<広帯域データ>

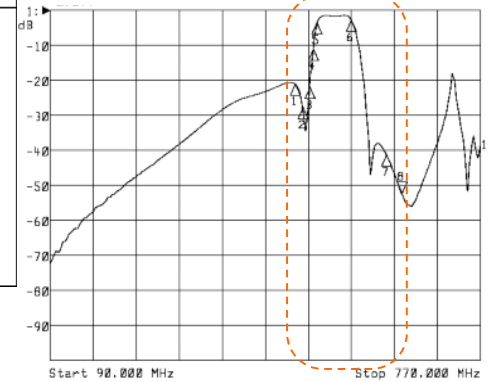

外観参考イメージ写真



寸法: W173×H105×D60mm