



名称: 東京 / 千葉・埼玉局受信混合器 指定ch帯域通過以外は減衰特性
 品番: MIX-2B(U20-U28/U30-U32)

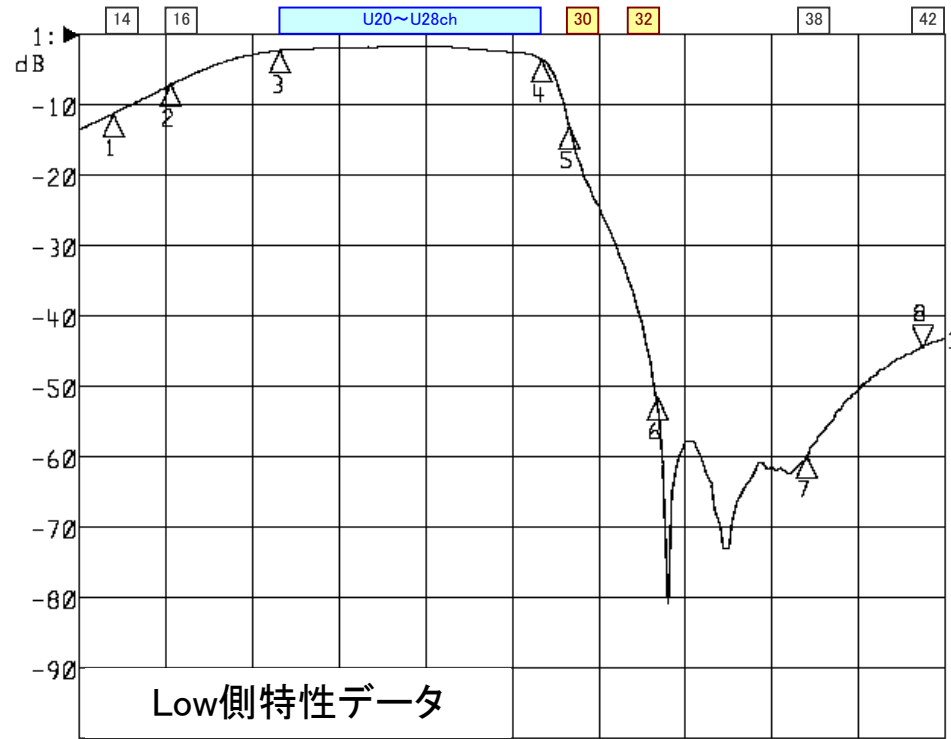


Center 560.000 MHz Span 180.000 MHz

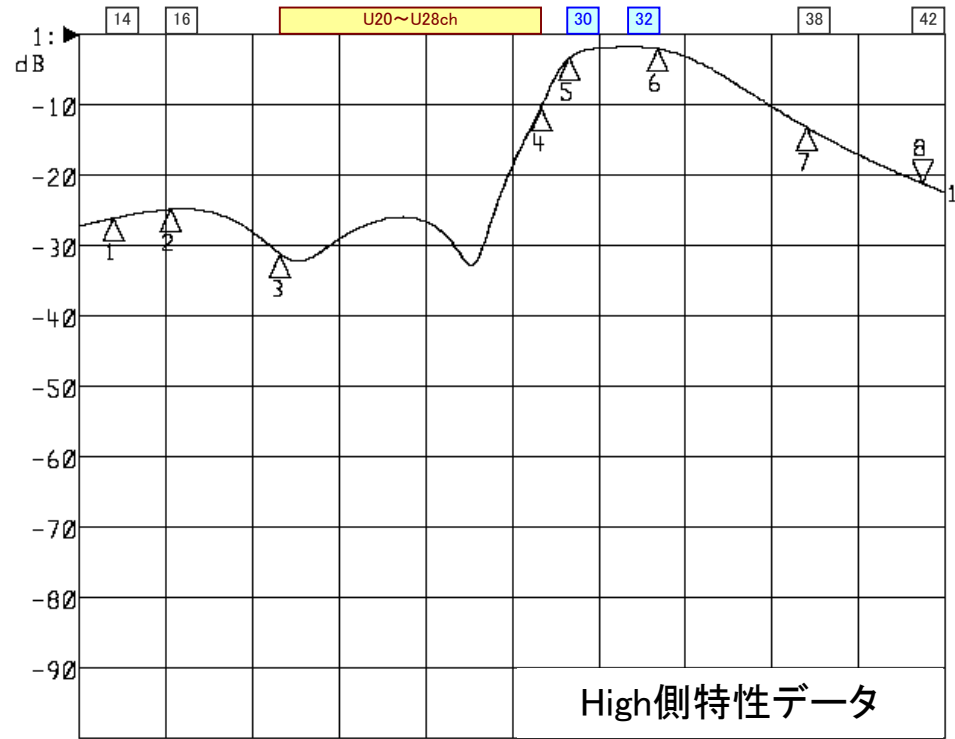

Center 560.000 MHz Span 180.000 MHz


1: Mkr (MHz)	dB
1: 477.2500	-11.215
2: 489.2500	-7.123
3: 512.0000	-2.312
4: 566.0000	-3.378
5: 572.0000	-13.067
6: 590.0000	-51.507
7: 621.2500	-59.853
8> 645.2500	-44.480

<広帯域データ>

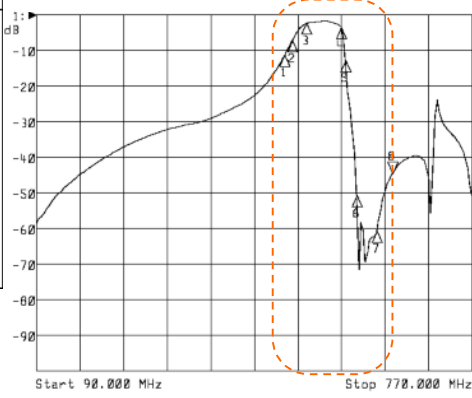

1: Mkr (MHz)	dB
1: 477.2500	-26.064
2: 489.2500	-24.853
3: 512.0000	-31.186
4: 566.0000	-10.456
5: 572.0000	-3.259
6: 590.0000	-1.979
7: 621.2500	-13.173
8> 645.2500	-21.123

<広帯域データ>

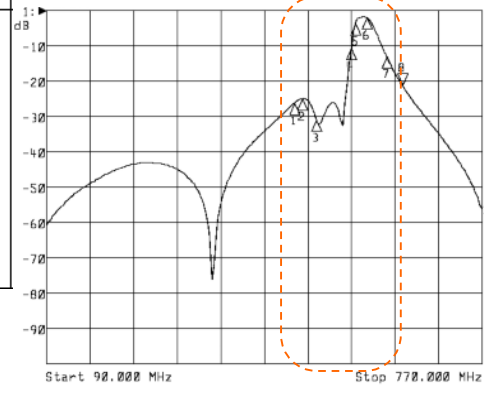

外観参考イメージ写真



寸法: W173×H105×D60mm

御参考
 Saito Saito Com Co., Ltd.
 サイトウ共聴特殊機器(株)