



名称:大阪 / 京都・神戸局受信混合器 指定ch帯域通過以外は減衰特性
 品番: **MIX-2B(U13-U19/U22-U26)**

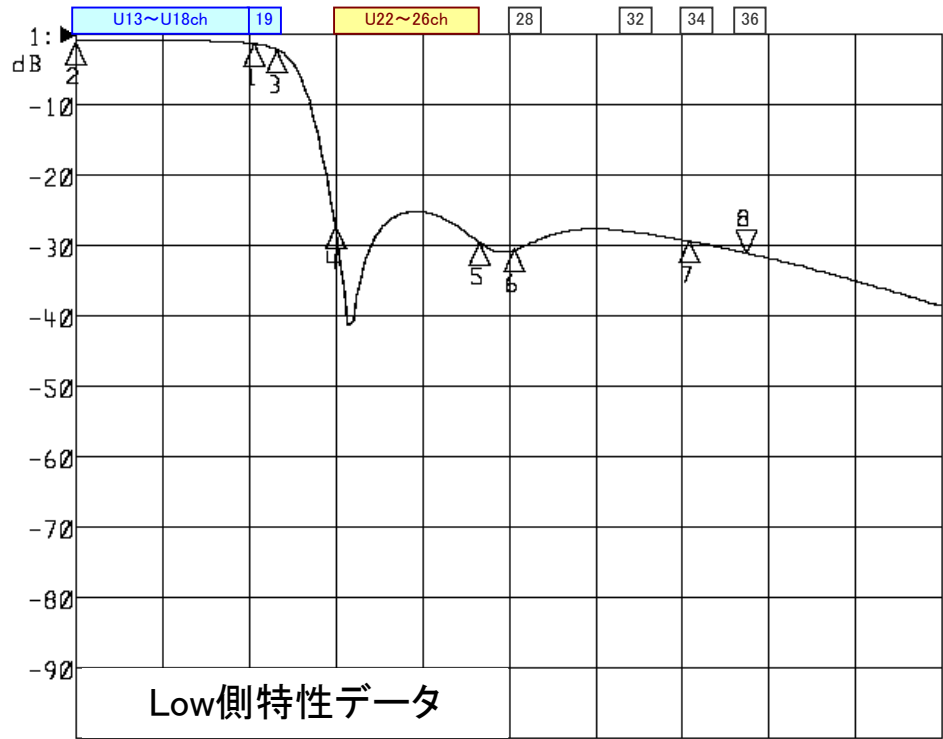


Center 560.000 MHz Span 180.000 MHz

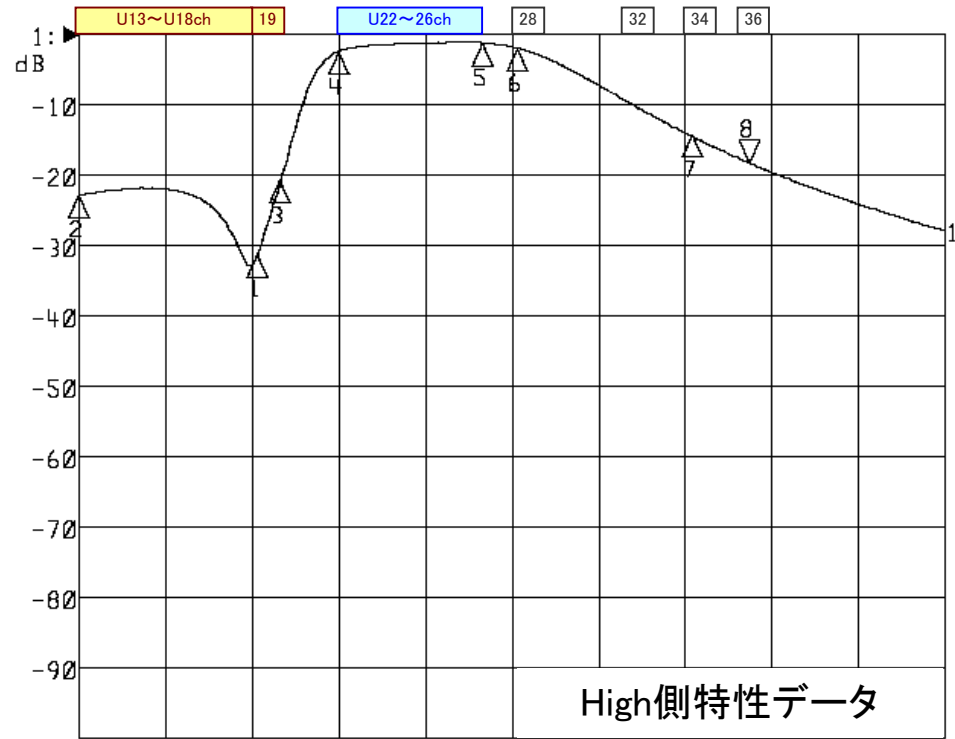

Center 560.000 MHz Span 180.000 MHz

1: Mkr (MHz)	dB
1: 507.2500	-1.321
2: 470.0000	-0.952
3: 512.0000	-2.175
4: 524.0000	-27.219
5: 554.0000	-29.572
6: 561.2500	-30.599
7: 597.2500	-29.347
8> 609.2500	-31.044

<広帯域データ>

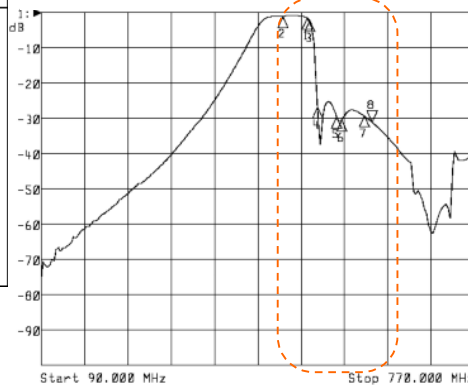

1: Mkr (MHz)	dB
1: 507.2500	-31.195
2: 470.0000	-22.819
3: 512.0000	-20.805
4: 524.0000	-2.375
5: 554.0000	-1.197
6: 561.2500	-1.946
7: 597.2500	-14.373
8> 609.2500	-18.191

<広帯域データ>



外観参考イメージ写真



寸法: W173×H105×D60mm